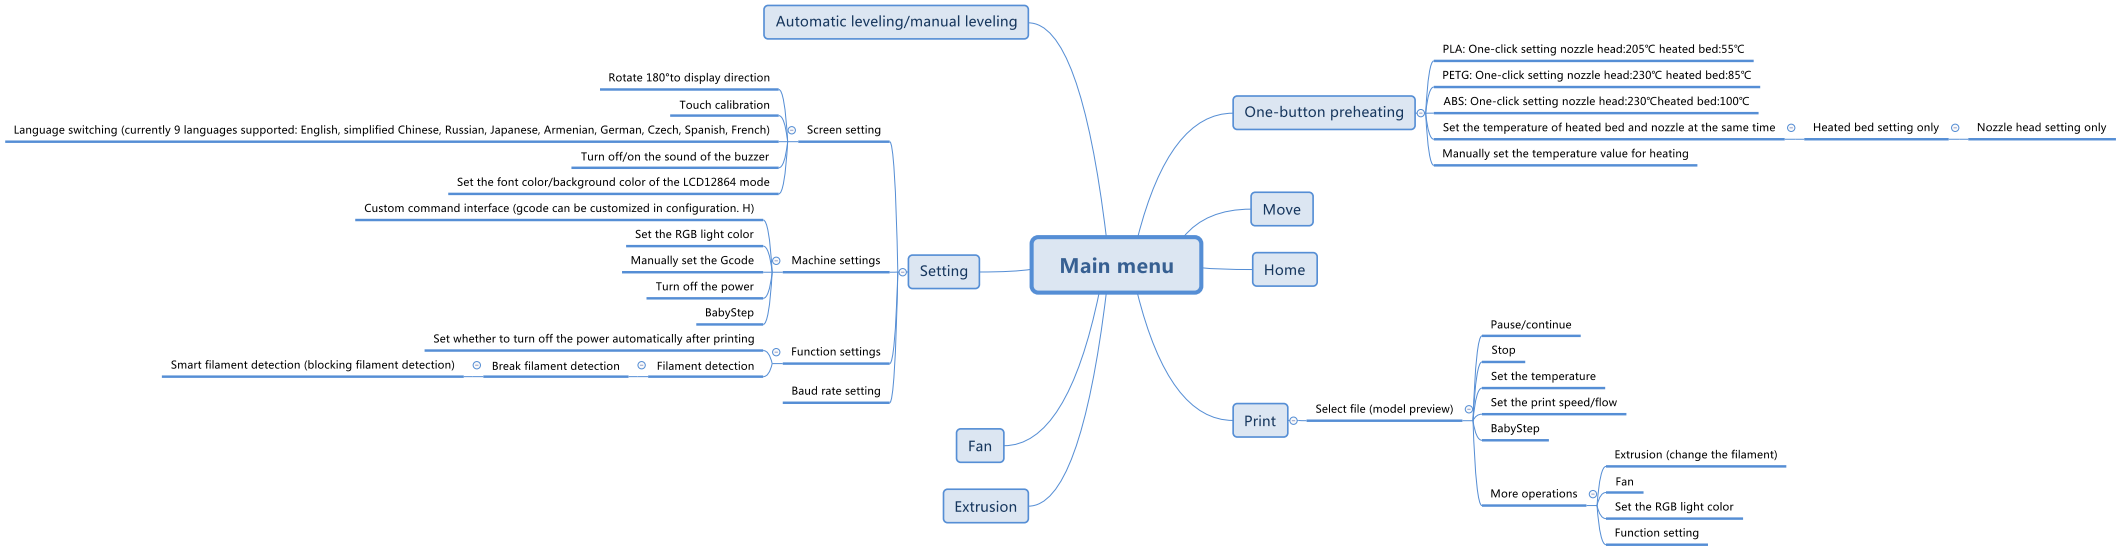
Main menu
Automatic leveling/manual leveling
Setting
Screen setting
Rotate 180°to display direction
Touch calibration
Language switching (currently 9 languages supported: English, simplified Chinese, Russian, Japanese, Armenian, German, Czech, Spanish, French)
Turn off/on the sound of the buzzer
Set the font color/background color of the LCD12864 mode
Machine settings
Custom command interface (gcode can be customized in configuration. H)
Set the RGB light color
Manually set the Gcode
Turn off the power
BabyStep
Function settings
Set whether to turn off the power automatically after printing
Filament detection
Break filament detection
Smart filament detection (blocking filament detection)
Baud rate setting
Fan
Extrusion
One-button preheating
PLA: One-click setting nozzle head:205℃ heated bed:55℃
PETG: One-click setting nozzle head:230℃ heated bed:85℃
ABS: One-click setting nozzle head:230℃heated bed:100℃
Set the temperature of heated bed and nozzle at the same time
Heated bed setting only
Nozzle head setting only
Manually set the temperature value for heating
Move
Home
Print
Select file (model preview)
Pause/continue
Stop
Set the temperature
Set the print speed/flow
BabyStep
More operations
Extrusion (change the filament)
Fan
Set the RGB light color
Function setting